


**ORIENTATION**

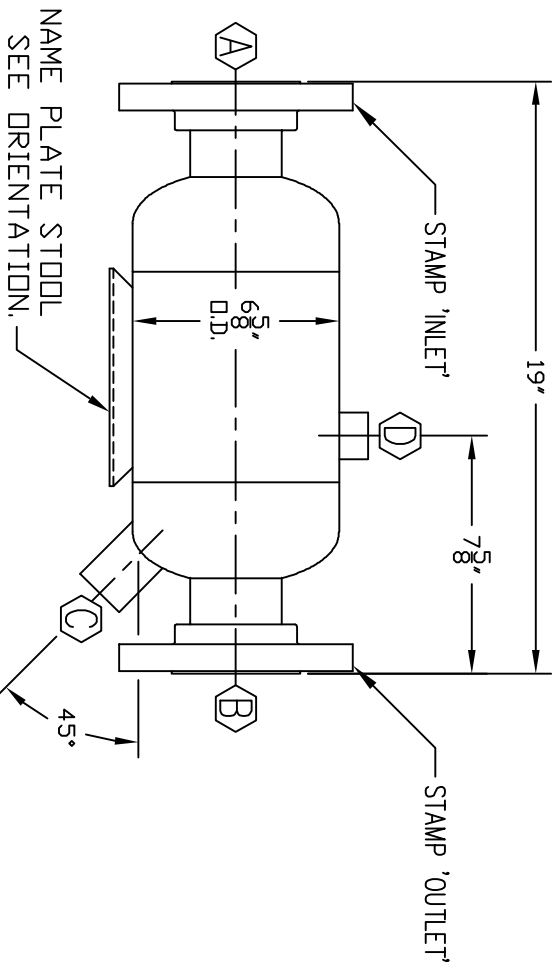

**DIMENSIONAL**

NOZZLE SCHEDULE				
MARK	SIZE	WALL THK.	NOZ. TYPE RTG-PSI	FUNCTION
A	2 1/2"	.203"	RF-SO 300	INLET
B	2 1/2"	.203"	RF-SO 300	OUTLET
C	1"	---	FULL GPLG 3000	DRAIN
D	1/2"	---	HALF GPLG 6000	VENT

- NOTES:
1. FLANGE BOLT HOLES TO STRADDLE VESSEL Q'S.
  2. APPROX. WEIGHT:
    - a. DRY-57 lbs.
    - b. FLOODED(WATER)-69 lbs.
  3. UNIT IS PAINTED WITH A HIGH HEAT RESISTANT PAINT, SAFETY BLUE.

**CONSTRUCTION**

A.S.M.E. SECTION VIII DIV. I  
2010 EDITION  
A.S.M.E. STAMP REQUIRED

DESIGN SPECIFICATIONS  
DES. PRESS. 500 PSI  
DES. TEMP. 650 F.  
FULL VACUUM YES  
CORR. ALL 1/16  
HYDRO. TEST 650 PSIG  
STRESS REL. NONE REQ'D  
RADIOGRAPH NONE REQ'D  
M.D.M.T -20 F. @ 500 PSI

NO.	DESCRIPTION	BY DATE	NO.	DESCRIPTION	BY DATE
REVISION: 0					

**DIDION SEPARATOR COMPANY**

A DIVISION OF

**DIDION'S MECHANICAL**

PH: (419) 483-2226  
FX: (419) 483-4382  
NOT BIGGEST... BEST!  
WEB: didionseparator.com  
e-mail: dmech@didionmech.com

<b>FABRICATION DETAILS</b>			
MODEL#: DSL-2.5-300	DATE: 03/18/10	APPR.:	DATE:
DRWN. JLD	DATE:	APPR.:	DATE:
CHK.	DATE:	APPR.:	DATE:
SCALE:	DRAWING NUMBER		REV.:
D.M. NO.	DSL-2.5-300-SALES		0
P.O. NO.			SHEET NO. 1 OF 1