


ORIENTATION

NOZZLE SCHEDULE					
MARK	SIZE	WALL THK.	NOZ. TYPE	RIG-PSI	FUNCTION
A	8"	.500"	RF-SO	300	INLET
B	8"	.500"	RF-SO	300	OUTLET
C	2"	--	FULL CPLG	3000	DRAIN
D	3/4"	--	HALF CPLG	6000	VENT

- NOTES:
1. FLANGE BOLT HOLES TO STRADDLE VESSEL Q'S.
 2. APPROX. WEIGHT:
 - a. DRY-513 lbs.
 - b. FLOODED(WATER)-730 lbs.
 3. UNIT IS PAINTED WITH A HIGH HEAT RESISTANT PAINT, SAFETY BLUE.

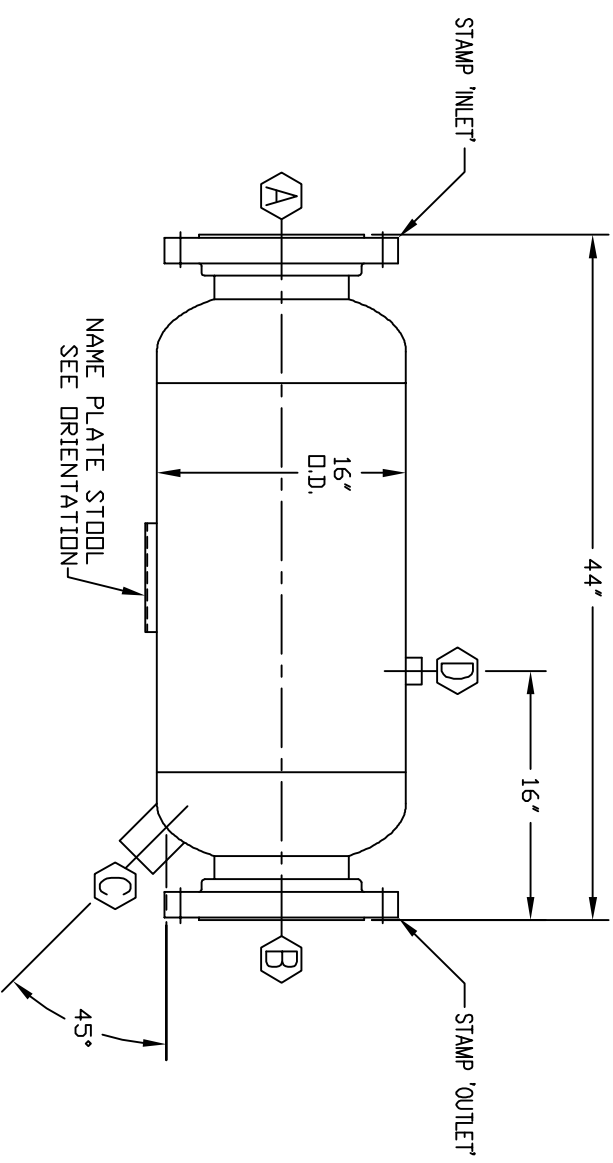

DIMENSIONAL

CONSTRUCTION	
A.S.M.E. SECTION VIII DIVISION I	
2010 EDITION	
A.S.M.E. STAMP REQUIRED	
DESIGN SPECIFICATIONS	
DES. PRESS.	500 PSI
DES. TEMP.	650 F.
FULL VACUUM	YES
CORR. ALL.	1/16
HYDRO. TEST	650 PSIG
STRESS REL.	NONE REQ'D
RADIOGRAPH	NONE REQ'D
M.D.M.T	-20 F. @ 500 PSI

NO.	DESCRIPTION	BY DATE	NO.	DESCRIPTION	BY DATE
REVISION: 0					
DIDION SEPARATOR COMPANY					
A DIVISION OF					
PH: (419) 483-2226 FX: (419) 483-4382			DIDION'S MECHANICAL <i>NOT BIGGEST... BEST!</i>		
DESCRIPTION: SEPARATOR DSL-8-300					
DRWN.	JLD	DATE: 03/23/10	APPR.	DATE:	DATE:
CHK.		DATE:	APPR.		
SCALE:		DRAWING NUMBER	REV.		SHEET
P.O. NO.		DSL-8-300	0		NO. 1
					OF 1

WEB: didionseparator.com
 e-mail: dmech@didionmech.com