


**ORIENTATION**

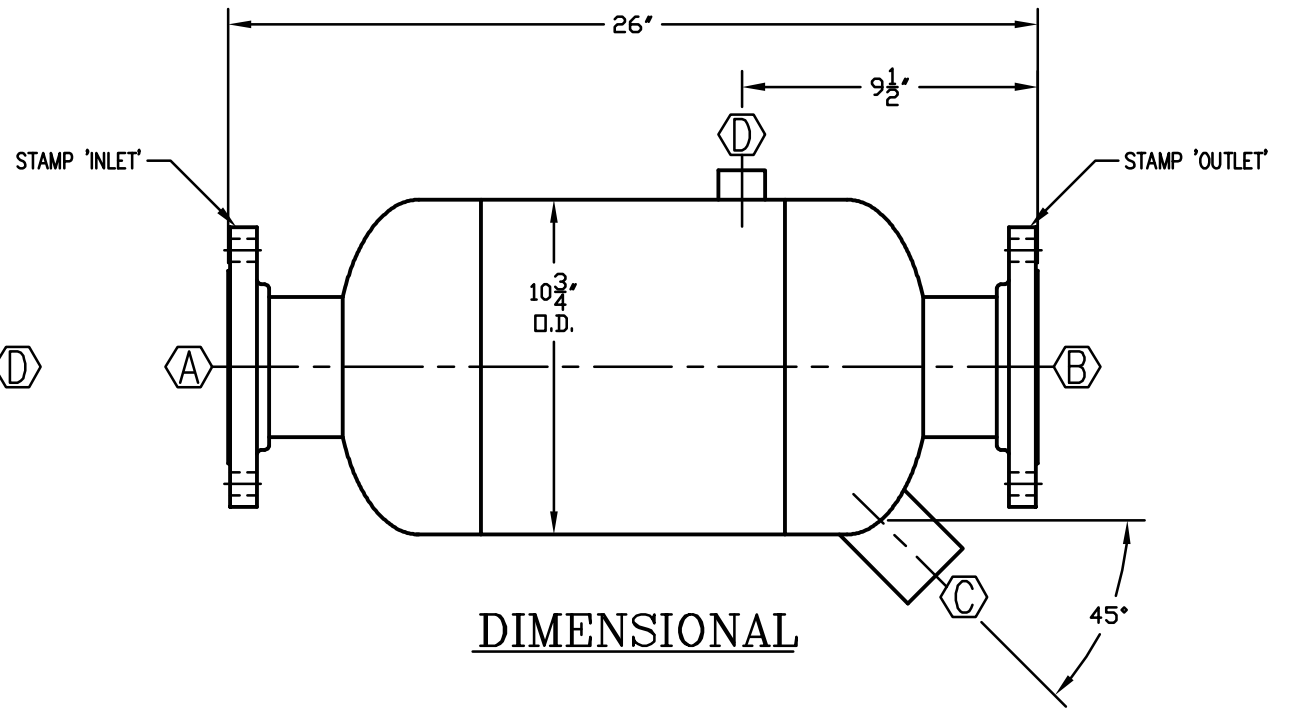


**DIMENSIONAL**

NOZZLE SCHEDULE					
MARK	SIZE	WALL THK.	NOZ. TYPE	RTG-PSI	FUNCTION
A	4"	.237"	RF-SO	150	INLET
B	4"	.237"	RF-SO	150	OUTLET
C	1 1/2"	--	FULL CPLG	3000	DRAIN
D	1/2"	--	HALF CPLG	6000	VENT

- NOTES:
1. FLANGE BOLT HOLES TO STRADDLE VESSEL C'S.
  2. APPROX. WEIGHT:
    - a. DRY-126 lbs.
    - b. FLOODED(WATER)-174 lbs.
  3. UNIT IS PAINTED WITH A HIGH HEAT RESISTANT PAINT, SAFETY BLUE.

CONSTRUCTION	
A.S.M.E. SECTION VIII DIVISION I	
A.S.M.E. U-1 STAMP REQUIRED	
DESIGN SPECIFICATIONS	
DES. PRESS.	150 PSIG
DES. TEMP.	500° F.
FULL VACUUM	YES
CORR. ALL.	1/16"
HYDRO. TEST	195 PSIG
STRESS REL.	NONE REQ'D
RADIOGRAPH	NONE REQ'D
M.D.M.T	-20° F. @ 150 PSIG

REVISION: 0				
NO.	DESCRIPTION	BY DATE	NO.	DESCRIPTION
<b>DIDION SEPARATOR COMPANY</b> A DIVISION OF  <b>DIDION'S MECHANICAL</b> <i>NOT BIGGEST....BEST!</i>				
PH: (419) 483-2226		WEB: didionseparator.com		
FX: (419) 483-4382		e-mail: dmech@didionsmech.com		
DESCRIPTION: HORIZONTAL/DOWN FLOW SEPARATOR				
MODEL#: DSL-4-150				
DRWN. JLD	DATE: 03/18/10	APPR.	DATE:	
CHK.	DATE:	APPR.	DATE:	
SCALE:	DRAWING NUMBER		REV.	SHEET
D.M. NO.	DSL-4-150-SALES		0	NO. 1
P.O. NO.				OF 1